
11-950 8" BENCH DRILL PRESS

DP-1B

PART NO. 900592 Revised: 07-14-04

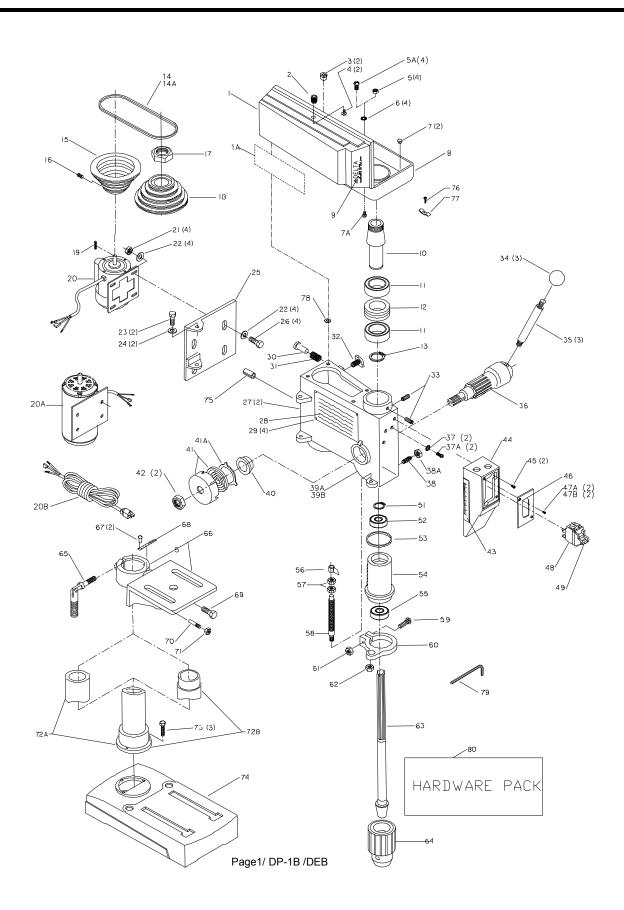

REPLACEMENT PARTS


Ref.			Ref.		
<u>No</u> .	Part No.	<u>Description</u>	<u>No</u> .	Part No.	<u>Description</u>
1	900935	COVER (NOTE A), T3, CF	40	1310034	SPRING SEAT
	1310061	COVER (NOTE A), T1, T2	41	1310084	SPRING ASSY
1A	900937	SPEED CHART, T3	41A	1310035	RETAINER
	1343740	SPEED CHART, T1, T2	42	902-01-010-1207	3/8-24 HEX NUT
2	1310065	KNOB	43	900941	SCALE
3	1310057	STRAIN RELIEF	44	1310059	SWITCH BOX, CF
4	1310547	M4.2 X 12MM CHEESE HD SCREW, T3	45 46	1246001	M5 X 12MM CHEESE HD SCREW
5	1246045 1243569	M6 X 10MM PAN HD SCREW, T1, T2	46 47A	1310069 1310547	COVER M4.2 X 12MM PAN HD SCREW (CMO)
5A	1246002	M4 HEX NUT, T3 M6 X 12MM CHEESE HD SCREW, T1, T2	47B	1310070	M4.8 X 16MM PAN HD SCREW (EMO)
6	1320102	M4.3 EXT TOOTH WASHER, T3	48	1343759	SWITCH, INCL:
-	1310062	M6.4 FLAT WASHER, T1, T2	49	1343758	KEY (NOTE B)
7	1310056	GROMMET	51	1310064	EXT RET RING
7A	1243501	M4 X 10MM CHEESE HD SCREW, T3	52	1310041	BEARING, T3
8	900936	COVER W/HINGES (NOTE A), T3		1310042	BEARING, T1, T2
	1310071	COVER W/HINGES (NOTE A), T1, T2	53	1310039	RUBBER WASHER
9	900939	NAMEPLATE 11950, T3	54	1310038	QUILL
40	1343743	NAMEPLATE 11950, T1, T2	55	1310041	BEARING
10	1310044	SLEEVE	56	1310011	POINTER
11 12	920-04-020-5335 1310046	BEARING SPACER	57 58	1243496 1310009	M10 HEX NUT STOP
13	1243407	EXT RET RING	59	1310009	M5 X 20MM ROUND HD SCREW
14	1349939	V-BELT (CURRENT MODELS ONLY) (NOTE D)	60	1310008	COLLAR
14A	1310066	V-BELT (EARLY MODELS ONLY) (NOTE D)	61	1243395	M5 HEX NUT
15	1310054	PULLEY	62	1243456	M6 HEX NUT
16	1243321	M6 X 10MM HEX SOC SET SCREW, T3	63	1310040	SPINDLE
	1310055	M6 X 6MM HEX SOC SET SCREW, T1, T2	64	1310049	CHUCK, INCL:
17	1310047	SPECIAL PULLEY NUT	**	1313104	CHUCK KEY
18	1310048	PULLEY	65	1310017	HANDLE
19	1311071	KEY	66	900949	TABLE ASSY, INCL:, T3
20A	1310050 1349962	MOTOR (EARLY MODELS ONLY) (NOTE D)	67	1310081	TABLE ASSY, INCL:, T1, T2 RIVIT
20 20B	1310051	MOTOR (CURRENT MODELS ONLY) (NOTE D) POWER CORD	68	1310016 900943	SCALE, T3, CF
21	1243398	M8 HEX NUT	00	1310015	SCALE, T3, GF SCALE, T1, T2
22	1311069	FLAT WASHER	69	901-01-060-0671	1/2-20 X 1" HEX HD SCREW
23	1246017	M8 X 30MM HEX HD SCREW	70	1310013	THREADED PIN
24	1243526	M8.4 FLAT WASHER	71	902-01-120-1034	1/4-20 HEX NUT
25	1310024	BRACKET, CF	72A	1310587	COLUMN ASSY (C.M.O.) (NOTE C)
26	1246139	M8 X 18MM HEX HD SCREW	72B	1310087	COLUMN ASSY (E.M.O.) (NOTE C)
27	1345382	M8 LOCK NUT	73	1246034	M8 X 20MM HEX HD SCREW
28	900417	WARNING LABEL, T3	74	1310001	BASE
00	1343746	WARNING LABEL, T1, T2	75 76	1310311	M4 X 22MM SPRING PIN (C.M.O.
29 30	1310016 1310022	RIVIT SLIDE ROD	76 77	1342455 1340715	PH SCREW CLAMP
31	1310022	SPRING	77 78	1343304	1/4" RUBBER WASHER
32	900436	LOCK SCREW, T3	79	422-29-101-0002	4MM HEX WRENCH
02	1310023	LOCK SCREW, T1. T2	80	n 901332	HARDWARE PACK
33	1246133	M8 X 8MM HEX SOC SET SCREW			
34	1349452	GRIP, T3	**	NOT SHOWN	
	1310030	GRIP, T1, T2			
	n 1349453	HANDLE BAR		EMO=EARLY MODE	
36	1310028	PINION		CMO=CURRENT M	ODELS
37	1320101	M5.3 EXT TOOTH WASHER			
37A	1310143	M5 X 8MM PAN HD SCREW			
38A 38	1243398 1310037	M8 HEX NUT M8 X 14MM HEX SOC SET SCREW			
39A	1310037	HEAD E.M.O. (NOTE C)			
39B	900950	HEAD C.M.O. (NOTE C), T3			
	1310539	HEAD C.M.O. (NOTE C), T1, T2			
		. , ,			

NOTE A: HARDWARE REQUIRED TO ASEMBLE UPPER AND LOWER PULLEY COVERS.

(4) 1243501 M4 X 10MM CHEESE HD SCREW


(4) 904-02-010-1726 LOCK WASHER (4) 1243569 M4 HEX NUT

NOTE B: DELTA HAS USED A NUMBER OF DIFFERENT TYPES OF SWITCHES FOR PRODUCTION.
ALL SWITHCHES ARE INTERCHANGABLE BUT THE KEYS ARE DIFFERENT.
REPLACEMENT SWITCHES COME COMPLETE WITH KEY. IF A REPLACEMENT KEY IS NEEDED, REFER TO DRAWING BELOW TO SELECT THE PROPER ONE.



NOTE C: EARLY MODEL HEADS WERE BORED TO ACCEPT 47MM COLUMNS (REF. NO. 72B) .CURRENT STYLE HEADS ARE BORED TO ACCEPT 48MM COLUMNS (REF. NO. 72A). EARLY COLUMNS (REF. NO. 72B) ARE STEPPED AT THE TOP, CURRENT COLUMNS (REF. NO. 72A) ARE STRAIGHT AT TOP. EARLY AND CURRENT MODELS ARE NOT INTERCHANGEABLE. REPLACE REF. 39A WITH ONE EA. OF REF. 75, 39B T2, & 72A.

NOTE D: EARLY MODEL MOTOR HAS A SMOOTH OUTSIDE BARREL AND MUST BE USED WITH EARLY MODEL V-BELT, CURRENT MODEL MOTOR HAS AN EXTERNAL FAN AND CAPACITOR, AND MUST BE USED WITH CURRENT MODEL V-BELT.

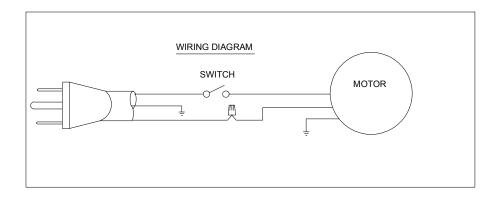

STANDARD SAFETY EQUIPMENT

In order to promote tool safety, Delta Machinery strictly enforces the policy of repairing or replacing any damaged or missing standard safety equipment on machines presented to Delta Authorized Service Centers for service/repairs. Any product that is presented to a Delta Authorized Service Center for repair with damaged or missing standard safety equipment will have that equipment repaired or replaced and the customer will be charged for any such service/repairs. Customers can avoid such charges only if the missing safety component is supplied to the service center at the time of repair.

This parts list is provided to aid in obtaining service parts. Copies of the instruction and maintenance literature can be obtained through the Delta Technical Publications Department, your service outlet, or by visiting the Delta Website @ www.deltamachinery.com.